

Argotec™ Graphic Film 46410 Clear

General Description

Typical application: Premium performance graphic film overlamine facestock

Polymer: Polycaprolactone-based aliphatic polyurethane (TPU)

Key attribute: Class A gloss finish, Highly conformable, Excellent abrasion resistance, Excellent low-temperature flexibility & cold-crack resistance, UV resistant (5 year outdoor durability), No additives-consistent, excellent adhesive compatibility/anchorage, Halogen free

Typical Property	Typical Method	Value
Gauge	N/A	1.0 - 4.0 mils
Width	N/A	Up to 62" (1.57 m)
Roll Length	N/A	Up to 1000 non-spliced yards
Tensile strength @ 100%	ASTM D-412	6500 psi (45 MPa)
Elongation at break	ASTM D-412	400%
UV resistance (yellowing)	ASTM D-4329 cycle B ¹	Change in Yellowness Index (ΔY_i) < 1.5 at 2000 hrs
Gloss, 60°	OTM 3-309	93%
Haze	ASTM D-1003	1%


¹QUV using UVA 340 bulb, 8 hours 70°C, 4 hours 50°C condensation

REACH Compliance: This product does not contain substances on the REACH/SVHC Candidate List at >0.1%

Note: Suitable for backside paper, poly coated paper, or matte textured film release liner to prevent blocking.


Argotec™ Graphic Film 46410 Clear

Accelerated Aging:

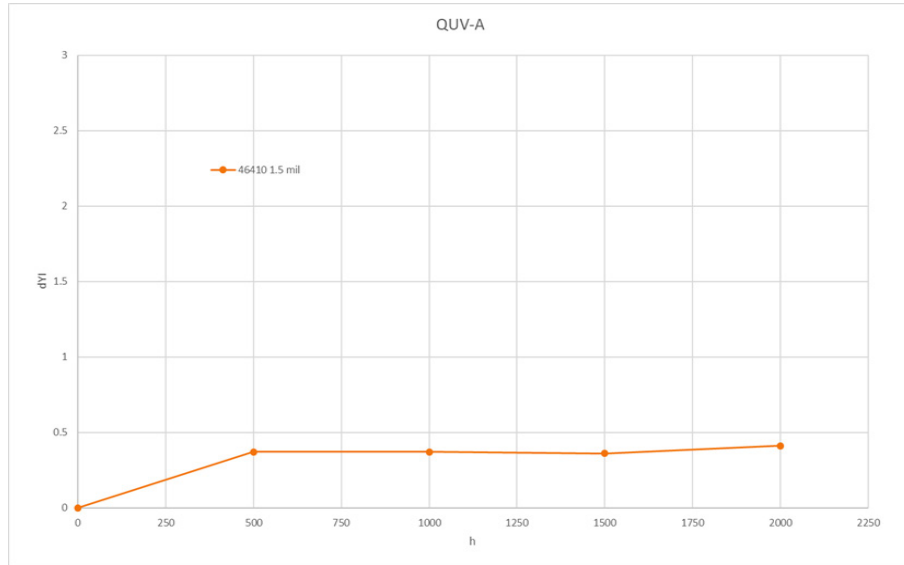

QUV using UVA 340 bulb, 8 hours 70°C, 4 hours 50°C condensation

UV Transmission Curve:

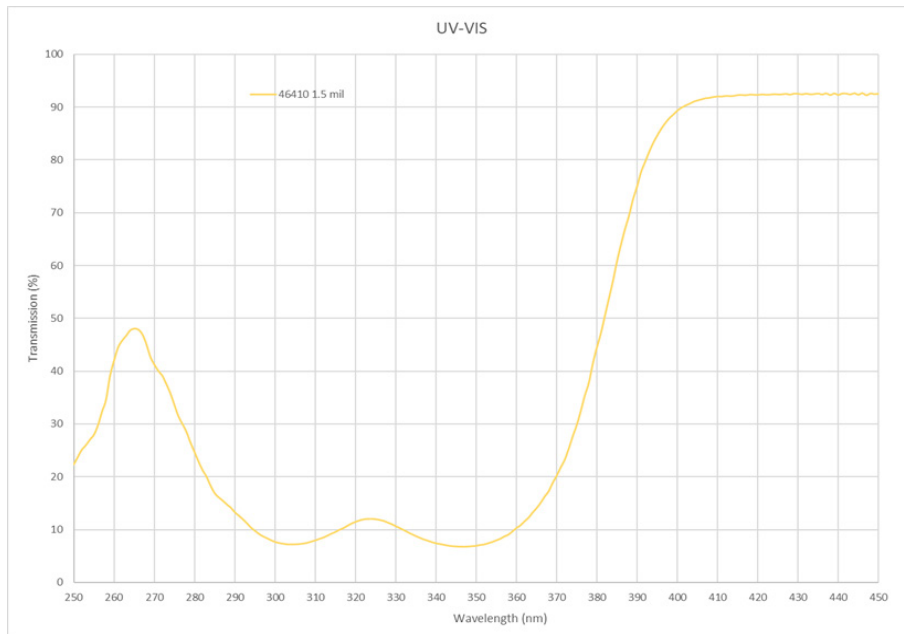

info@argotec.com
argotec.com

Copyright ©Mativ Holdings, Inc. (2023). All Rights Reserved. ARGOTEC™ is trademarks of Mativ Holdings, Inc. ("Mativ") or an affiliated company of Mativ.

All statements, product characteristics, and performance data contained herein are believed to be reliable based on observation and testing, but no representations, guarantees, or warranties of any kind are made as to accuracy, suitability for particular applications, or the results to be obtained. Nothing contained herein is to be considered to be permission or a recommendation to use any proprietary process or technology without permission of the owner. No warranty of any kind, expressed or implied, is made or intended.